

Warranty:

The product design should be varied to keep the product continuously updated. The product price should be subject to possible variations for eventual rises of production costs or duties. Claims for possible damages during the freight must be notified to the carrier. All claims must be notified to the distributor or manufacturer within 8 days from the receipt of goods. Buyer is responsible for the right installation and the use of the apparatus.

The apparatus is covered by a **TWO-YEAR** warranty from the date of purchase against defects of manufacture and components. Defects and breakages caused by wrong use/connection are not subject to warranty. For any dispute is competent the Tribunal of Bratislava, Slovak Republic.

DECLARATION OF CONFORMITY
According to guide lines 89/336 EEC and 92/31 EEC:

Name of producer: SRS Light Design s.r.o.

Address of producer: Rybnicna 36/D, SK- 83106 Bratislava, Slovak Republic

Declares that the product

Name of product: Single channel dimming unit DP1/DP2/DP3

Type: 1x 2000W, 1x 3000W, 1x 3680W


Corresponds to the following product specifications:

Safety: EN60065, resp. EN 60950

EMC: EN55103-1, resp. EN55103-2

Additional information:

All DMX512 and analogue inputs and outputs must be shielded and the shielding must be connected to the ground respective to the case of the corresponding plug. The unit and all connected apparatuses must also be earthed via main cable. Always check for correct shielding of the device.

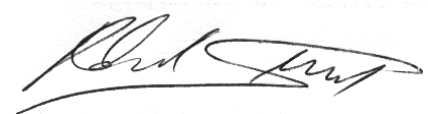A handwritten signature in black ink, appearing to read 'Robert Sloboda', written over a horizontal line.

Bratislava, May 10, 2009

Robert Sloboda

Single-Channel Dimming Pack DP3

Digital dimmer DP3 is designed to fulfill all the requirements of most lighting applications – television and other special scenarios when single-channel dimming is necessary. It is equipped with 400us Risetime choke which guarantees very low lamp noise.



- 1x 16A output power
- Risetime of 400 uS
- Easy setting with 10-pin DIP switch
- DMX address selector
- LTP merge function
- DMX input with THRU output
- Analogue potentiometer
- Phase-angle control with TRIAC
- Double Overheat protection
- Outputs connectors
 - SCHUKO
 - French SCHUKO
 - CEE16/3p
 - Neutrik PowerCon
 - Danish
 - UK
 - other

DMX input with THRU output

USITT DMX 512 (1990)

Input is protected by transil diodes – high voltage protection by clamping action (peak power 600W, 10/1000us)

Power supply

230V, 50Hz, main cable 3x1.5mm 16A socket

Temperature of use

-20...+65°C

Housings & Dimensions

Steel housing with powder coating

265 x 121 x 66 mm

Weight

3kg

Minimum/Maximum Load

60W / 3680W

IMPORTANT INSTRUCTIONS:

All safety and operating instructions should be read before the equipment is installed or operated.

IMPORTANT SAFETY INFORMATION:

The following general safety precautions have to be observed during all phases of operation, service, and the repair of this equipment. Failure to comply with these precautions or with specific warnings in this manual violates safety standards of design, manufacture, and the intended use of this equipment.

Do not operate this equipment in the presence of flammable gases or fumes. Operation of any electrical instrument in such an environment constitutes a definite safety hazard. Do not operate this equipment near water or in areas with wet floors or in high humidity atmosphere where condensation forms on the equipment.


It should never be placed near or over a heat register or other source of heated air and it should not be installed or operated without proper ventilation.

Device must be connected to the secured circuit with circuit breaker or main switch of maximum 16A. The device does not contain any fuses and there are no serviceable parts inside.

Device use:


Device is controlled via DMX or analogue fader and the controlling is done via the LTP rule. LTP: Last time presence: a change of one signal takes controlling of output dimming signal.

Device Front panel description

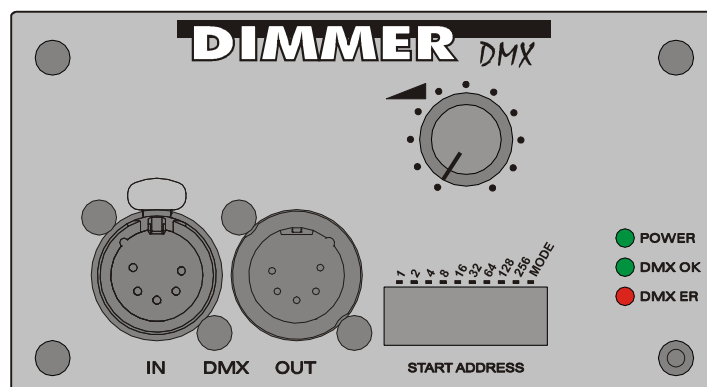

1. DMX IN / DMX OUT connector

- Pin 1 GND
- Pin 2 Data -
- Pin 3 Data +
- Pin 4, 5 Not connected



2. DMX start address and MODE selector switch

- a. DMX address : switches #0-9: active on TOP
- b. MODE switch : switch #10:
 - i. DMX & analogue – DIP switch in position 1 – TOP
 - ii. analogue only – DIP switch in position 0 – BOTTOM

In analogue only mode, the DMX OUT connector is disconnected from the DMX IN connector

3. ANALOGUE fader

- i. 0-100% of output value

4. POWER LED


- i. Solid GREEN – all OK
- ii. Blinking GREEN – overheat
- iii. Fast blinking GREEN – under- or overvoltage

5. DMX OK LED

- i. Solid GREEN – DMX signal OK
- ii. Off – DMX signal not present

6. DMX ERR LED

- i. Solid RED – DMX signal ERR – check cable for 2/3 inversion connection
- ii. Off – DMX signal not present

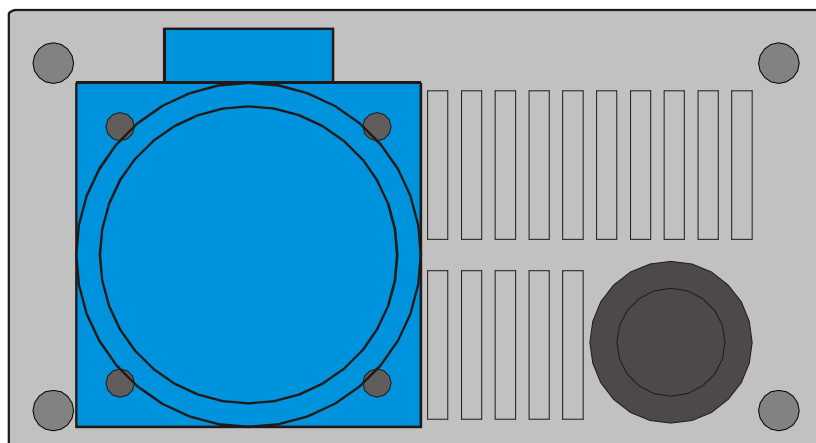Device Rear panel description

1. Input 16A 3x1.5mm 2m-long power cable
2. Output socket
3. Mini MCB16A