

Application

Beam style	symmetric flood
Suitable for	architectural, display and retail areas
Specification level	professional range
Typical throw distance	2 - 10m

Electrical specifications

Supply Volts	230/240V AC single phase 50/60 Hz
Max. Lamp Watts	150W
Lamp base	RX7s
Auto-disconnect	no
Cable/connection	1.5m, 3x1.5mm ² flexible cable to bare ends
PSU	electronic power supply unit
Power factor correction	0,95
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment, moulded steel-sheet
Reflector	symmetrical, 99% pure aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting holes
Weight/Packed weight	3,6kg / 5,3kg
Packed volume	0.069m ³
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety glass	included
Colour frame	metal, 244 x 195mm supplied
Lamp access	front access

Operational specifications

Positional adjustment	tilt lock on one side
-----------------------	-----------------------

Lamp types

150W	CDM-TD 150/830 RX7S 3000k ² 15.000 hrs
150W	CDM-TD 150/942 RX7S 4200k ² 15.000 hrs

LDR recommends Phillips lamps

Accessories

Lamps	see above
Spare metal colour frame	■ 20100121 □ 20100121B ■ 20100121C
Safety guard	20100220
Spare clear safety glass	20101420
4-leaf barndoor	■ 20100420 □ 20100420B ■ 20100420C □■ 20100420D ■ 20100420E
Hook clamp	20100900
Alu-grip clamp	20101100
Safety bond	20101200
Electrical adapter	see separate literature
Mechanical track adapter	see separate literature.

Photometric data

CDM-TD 150

Horizontal									
Beam dia.	3.2	4.9	6.5	8.1	9.7	11.3	13	14.6	m
lux	760	338	190	122	84	62	48	38	
Distance	2	3	4	5	6	7	8	9	m

Vertical									
Beam dia.	1.9	2.8	3.7	4.7	5.6	6.5	7.5	8.4	m
lux	1100	483	275	176	122	90	69	54	
Distance	2	3	4	5	6	7	8	9	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

rima[®] S150

150W

discharge symmetric floodlight

part number: ■ 10156060 □ 10156061 ■ 10156062

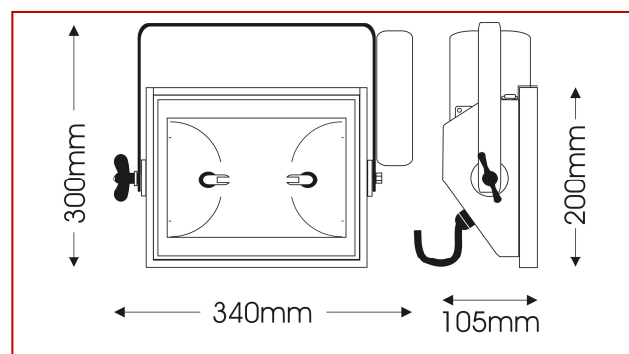

Stylish and high specification 150W symmetrical discharge floodlight, ideal for usage in all those architectural, display and retail areas applications where a powerful yet low consumption and long lasting beam of light is required.

The unit is supplied with an electronic ballast unit. A safety glass, a colour frame and 1.5m mains cable are included in standard delivery. Available to special order in any colour from the RAL range.



Luci della Ribalta
Via berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

Issue: ap ©2008. LDR reserves the right to alter the specification without prior notice.