

SUONO F 250 MSD

■ 10201080 Black □ 10201081 White ▣ 10201082 Silver

ACCESSORIES

- 20100103**
colour frame, black
- 20100103B**
colour frame, white
- 20100103C**
colour frame, silver
- 20100303**
4-leaf barndoor, black
- 20100303B**
4-leaf barndoor, white
- 20100303C**
4-leaf barndoor, silver
- 20100303D**
4-leaf barndoor, white/black
- 20100303E**
4-leaf barndoor, silver/black
- 20100900**
hook clamp
- 20101100**
alu-grip clamp




54

PRODUCT SPECS

- lens type**
120mm dia. Fresnel
- reflector**
55mm dia. glass
- microswitch**
no
- ballast**
built-in-PFC
- colour frame**
150x150mm
- throw**
2-20m
- beam angle**
7°-63°
- voltage**
208/230/260V
- weight**
8,6kg

COMPATIBLE LAMPS

- Philips MSD 250 GY9.5** 6700°K 3000hrs
- Philips MSD 250/2 GY9.5** 8500°K 3000hrs
- Philips MSA 300 GY9.5** 6000°K 4000hrs
- LDR recommends Philips lamps

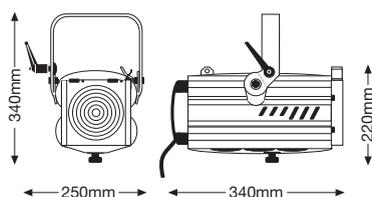

High power discharge Fresnel spotlight for display and internal architectural lighting applications. Suono f250 can use either a 250W MSD or a 300 MSA lamp and produces a soft-edged beam with a variable beam angle ranging from 7° to 63°.

A multi-frequency built-in ballast, colour frame and 1.5m mains cable are all supplied as standard. Available to special order in any colour from the RAL range.

Illuminatore fresnel per lampade a scarica 250MSD o 300MSA, ideale per utilizzi architeturali su aree espositive, in show room, vetrine, musei o centri commerciali. Viene fornito di serie completo di ballast multi-frequenza incorporato, telaio porta-gelatina 150x150mm e 1.5m cavo di alimentazione. A richiesta è disponibile in qualsiasi colore della gamma RAL.



PHOTOMETRIC DATA

MSD 250/2

SPOT	m ∅	0,2	0,4	0,5	0,6	0,7	0,9	1	1,1	1,2
	lux	23.150	10.289	5.788	3.704	2.572	1.890	1.447	1.143	926
FLOOD	m →	2	3	4	5	6	7	8	9	10
	m ∅	2,5	3,7	4,9	6,1	7,4	8,6	9,7	11	12,3
	lux	3.300	1.467	825	528	367	269	206	163	132
	m →	2	3	4	5	6	7	8	9	10