

## Application

Beam style	symmetric flood
Suitable for	small-scale theatre, general floodlighting
Specification level	professional range
Typical throw distance	2 - 5m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	500W
Lamp base	R7s
Auto-disconnect	single-pole microswitch
Cable/connection	1.5m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment. A full range of units and accessories for multiple row general floodlighting is available to separate order
Reflector	symmetrical, aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting
Weight/Packed weight	2,6kg / 3,1kg
Packed volume	0.017m <sup>3</sup>
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety glass	supplied
Colour frame	metal, 244 x 195mm supplied
Lamp access	front access

## Operational specifications

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side

## Lamp types

160W	Plusline ES Small R7s 230V 3100lm 2.000 hrs
240W	Plusline ES Small R7s 230V 4900lm 2.000 hrs
400W	Plusline ES Small R7s 230V 8700lm 2.000 hrs

## LDR recommends Philips lamps

## Accessories

Lamps	see above
Spare metal colour frame	■20100121 □20100121B ■20100121C
Clear safety glass	20101420
Safety guard	20100220
4-leaf barndoor	■20100420 □20100420B ■20100420C □■20100420D ■20100420E
Hook clamp	20100900
Safety bond	20101200

**For full info on Rima modular system please see Rima S500 Pro no-stirrup data sheet**

## Photometric data

Horizontal		ES400									
Beam dia.		3.2	4.9	6.5	8.1	9.7	11.3	13	14.6	16.2	m
lux		913	406	228	146	101	74	57	45	37	
Distance		2	3	4	5	6	7	8	9	10	m

Vertical											
Beam dia.		1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5	m
lux		1345	598	336	215	149	110	84	66	54	
Distance		2	3	4	5	6	7	8	9	10	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# rima<sup>®</sup> S500 F Pro

## 200 - 500W

### symmetric floodlight

part number: ■10516060 □10516061 ■10516062

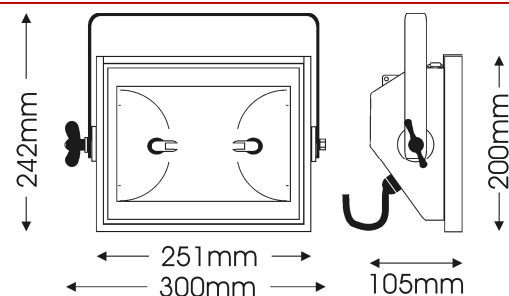

New, stylish and high specification 500W symmetric floodlights, ideal for all applications where a wide, even wash of light is required. Improved design prevents any light spill.

Rima S500F Pro is designed for usage as single module flood, and is delivered complete with colour frame, a single microswitch interlock for safe lamp replacement, a safety glass and 1.5m mains cable, whereas a large choice of accessories is available as optional extras.

**Available to special order with extended front chassis for longer gel life.**



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
fax: +39 0376 772140  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2010. LDR reserves the right to alter the specification without prior notice.