

HTI 403 W/24

HTI | Metal halide lamps with reflector



Areas of application

- Medical endoscopy
- Industrial boroscopy
- Light guide systems in the entertainment sector

Product benefits

– Highly efficient lighting systems for injecting light into a light guide

Product features

- Short-arc lamps with dichroic focusing reflector







Product datasheet

Technical data

Electrical data


Nominal wattage	403.00 W
Nominal voltage	55.0 V
Nominal current	7.3 A
Lamp current	7.3 A

Photometrical data

Light technical data

Focal length	24.0 mm

Dimensions & weight



Diameter	67.0 mm
Length	73.0 mm

Lifespan

Lifespan	750 h


Capabilities

Burning position	p15/s15
------------------	---------

Product datasheet

Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, HTI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

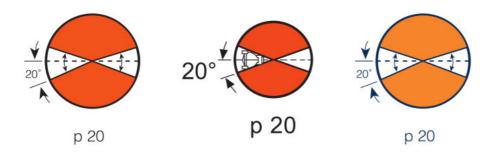

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.