

ARIA PC 1000 PLUS

■ 10802000 Black □ 10802001 White ■ 10802002 Silver

ACCESSORIES

- 20100106**
colour frame, black
- 20100106B**
colour frame, white
- 20100106C**
colour frame, silver
- 20100206**
safety guard, black
- 20100206B**
safety guard, white
- 20100206C**
safety guard, silver
- 20100306**
4-leaf barndoor, black
- 20100306B**
4-leaf barndoor, white
- 20100306C**
4-leaf barndoor, silver
- 20100306D**
4-leaf barndoor, white/black
- 20100306E**
4-leaf barndoor, silver/black
- 20100900**
hook clamp
- 20101100**
alu-grip clamp
- 20101200**
safety bond
- 20106019**
colour scroller Xpress 19

PRODUCT SPECS

- lens type**
150mm dia. pebble-convex
- reflector**
100mm dia. aluminium
- microswitch**
no
- colour frame**
185x185mm
- throw**
2-17m
- beam angle**
8°-60°
- weight**
6kg




COMPATIBLE LAMPS

- CP67 GX9.5** 650W 230V/240V 3200°K 120hrs
 - T21 GX9.5** 650W 230V/240V 3000°K 900hrs
 - CP70 GX9.5** 1000W 230V/240V 3200°K 240hrs
 - T19 GX9.5** 1000W 230V/240V 3050°K 900hrs
 - CP90 GX9.5** 1200W 230V/240V 3200°K 240hrs
 - T29 GX9.5** 1200W 230V/240V 3000°K 480hrs
- LDR recommends Philips lamps

Compact, high-quality yet budget-priced 650W- 1200W PC spotlight producing a variable, well defined beam ranging from 8° to 60°. It is ideal for non professional applications in medium-sized venues. A colour frame, safety guard and 1.5m mains cable are all included as standard.

Illuminatore piano-convesso da 1000/1200W, di elevato standard qualitativo e tuttavia di gamma economica. Produce un fascio di luce dai bordi ben definiti e regolabile tra 8° e 60°. E' particolarmente indicato in utilizzi non professionali su distanze medio-lunghe. Fornito di serie completo di telaio porta-gelatina, rete di protezione e 1,5m cavo di alimentazione.

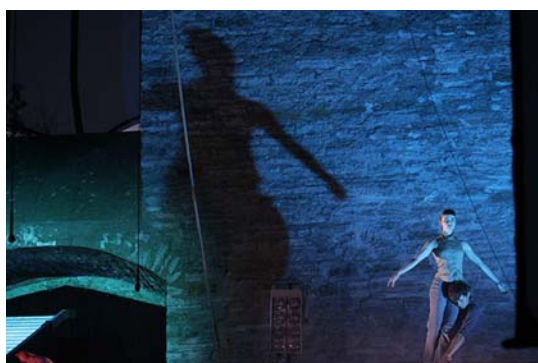

PHOTOMETRIC DATA

CP90

	1,0	1,1	1,3	1,4	1,5	1,7	1,8	2,0	2,1
SPOT									
m ∅	1,0	1,1	1,3	1,4	1,5	1,7	1,8	2,0	2,1
lux	4.996	3.825	3.022	2.448	2.032	1.700	1.449	1.249	1.088
m	7	8	9	10	11	12	13	14	15
FLOOD									
m ∅	2,3	3,5	4,6	5,8	6,9	8,1	9,2	10,4	11,5
lux	2.440	1.084	610	390	271	199	153	120	98
m	2	3	4	5	6	7	8	9	10

