NOTA 18/36

■ 10853030 *Black* □ 10853031 *White* ■ 10853032 *Silver*

ACCESSORIES

20100106
colour frame

20100206
safety guard

20100706
iris diaphragm

20100806
gobo holder - A/B size

20100900
hook clamp

20101100
alu-grip clamp

20101200
safety bond

20106019
colour scroller Xpress 19

PRODUCT SPECS

optical system
double condenser + zoom

reflector
68mm dia. glass

microswitch
double-pole

colour frame
185x185mm

throw
5-18m

beam angle
18°-36°

weight
12,3kg

COMPATIBLE LAMPS

CP67 GX9.5 650W 230V/240V 3200°K 120hrs
T21 GX9.5 650W 230V/240V 3000°K 900hrs
CP70 GX9.5 1000W 230V/240V 3200°K 240hrs
T19 GX9.5 1000W 230V/240V 3050°K 900hrs
CP90 GX9.5 1200W 230V/240V 3200°K 240hrs
T29 GX9.5 1200W 230V/240V 3000°K 480hrs

• LDR recommends Philips lamps

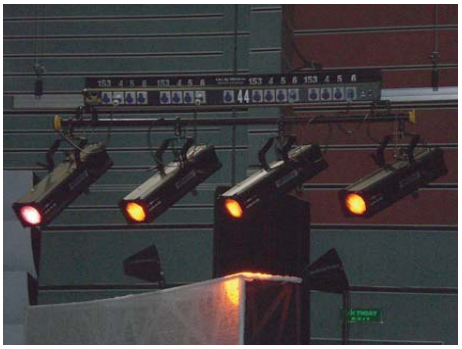

This wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection.
The comprehensive feature list includes 18° - 36° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute overstage rigging angles and a double-microswitch interlock for safe lamp replacement.
A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.

Sagomatore da 1000/1200W ad angolo largo e dall'elevato profilo tecnico-qualitativo.
Dispone di ottica primaria a doppio condensatore per una precisa proiezione gobo, di gruppo centrale girevole, ottica secondaria a tre elementi, doppio microinterruttore e blocco forcella a leva.
Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 2m cavo di alimentazione.

PHOTOMETRIC DATA — CP90
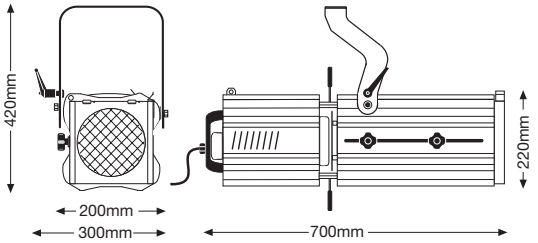
NARROW	m ø	3,8	4,1	4,4	4,8	5,1	5,4	5,7	6,0	6,3
	lux	1.528	1.302	1.122	978	859	761	679	609	550
	m	12	13	14	15	16	17	18	19	20
WIDE	m ø	4,5	5,2	5,8	6,5	7,1	7,8	8,4	9,1	9,7
	lux	1.082	828	654	530	438	368	314	270	236
	m	7	8	9	10	11	12	13	14	15