

Application

Beam style	well-defined, flat field profile projection
Suitable for	small, medium scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 - 20m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1200W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	epoxy powder paint, black or white
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø28mm tube supplied
Handle	rear and side
Weight/Packed weight	18kg / 22,4kg
Packed volume	0.204m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/ softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs
-------	--

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106	□20100106B	
5-colour colour changer	■20105106	□20105106B	
Spare iris diaphragm	20100707	Gobo holder, A/B size	20100807
Black tripod	20102401	Chrome plated tripod	20102402
Spare spigot ø28mm	20102200		
Kit 1-hand control iris/dowser	20107070	Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107080	for f.spot/ballast/col.chang./tripod	

Photometric data

Narrow focus		CP90									
Beam dia.		1.7	1.8	2	2.1	2.2	2.4	2.5	2.7	2.8	m
lux		2118	1805	1556	1356	1191	1055	941	845	763	
Distance		12	13	14	15	16	17	18	19	20	m

Wide focus


Beam dia.	3.9	4.3	4.7	5.1	5.4	5.8	6.2	6.6	7	m
lux	1540	1273	1069	911	786	684	602	533	475	
Distance	10	11	12	13	14	15	16	17	18	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto® 1200th MK2

1200W, 230/240V TH
followspot


part number : ■10857170 □10857171

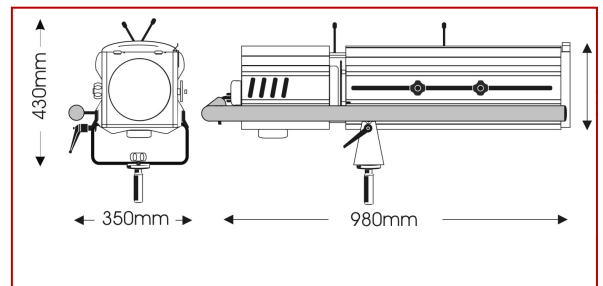

This compact, short to medium throw tungsten-halogen followspot has been completely re-engineered to offer the market an even wider and better set of features.

A large, user-friendly side handle, new mechanics on the mechanical dimmer and a number of new features add to the existing specifications which have made Canto® a world-wide success.

A 20-leaf iris diaphragm, mechanical dimmer, spigot, colour frame and 2m mains cable are also included as standard, and a 5-colour colour changer is available as an optional extra.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2008. LDR reserves the right to alter the specification without prior notice