TONO F 2000 PLUS

■ 10901000 230V *Black*
■ 11901000 120V *Black*

ACCESSORIES

20100107
colour frame, black
20100207
safety guard, black
20100307
4-leaf barndoor, black
20101000
hook clamp HD
20101100
alu-grip clamp
20101200
safety bond
20106026
colour scroller Xpress 26

PRODUCT SPECS

lens type
200mm dia. Fresnel
reflector
87.5mm dia. glass
microswitch
double-pole
colour frame
245x245mm
throw
3-20m
beam angle
10°-70°
lamp base
G22 (120V) - G38 (130V)
weight
9kg (230V) 10,1kg (120V)

COMPATIBLE LAMPS

CP55 G22 2000W 230V/240V 3200°K 480hrs
CP75 G22 2000W 230V/240V 3200°K 480hrs
CP92 G22 2000W 230V/240V 3200°K 400hrs
CP72 G16 2000W 230V/240V 3200°K 480hrs
CP91 G22 2500W 230V/240V 3200°K 400hrs
CYX G38 2000W 120V 3200°K 350hrs

• LDR recommends Philips lamps

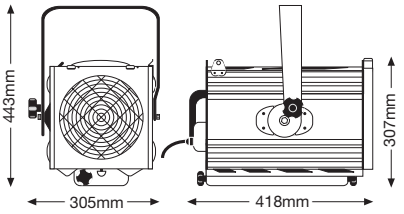

PHOTOMETRIC DATA — CP75

SPOT	m ø	2,3	2,5	2,7	2,9	3,1	3,3	3,5	3,7	3,9
	lux	1.563	1.331	1.148	1.000	879	779	694	623	563
	m →	12	13	14	15	16	17	18	19	20
FLOOD	m ø	4,2	5,6	7,0	8,4	9,8	11,2	12,6	14,0	15,4
	lux	2.200	1.238	792	550	404	309	244	198	164
	m →	3	4	5	6	7	8	9	10	11

Compact, lightweight and powerful 2/2.5KW fresnel spotlight.
It features an extremely wide beam angle and includes a height adjustable, robust G22 lamp-base, screw focus, strong tilt lock and double-microswitch interlock for safe lamp replacement. A colour frame, safety guard and 1.5m mains cable are included as standard.

Illuminatore fresnel da 2/2500W estremamente compatto, leggero e potente. Dispone di robusto portalampada G22 regolabile in altezza, messa a fuoco di precisione con vite senza fine, bloccaggio forcella a frizione e doppio microinterruttore di sicurezza. Fornito di serie completo di telaio portagelatina, rete di protezione e 1.5m cavo di alimentazione.

On request also available with GY16 lamp-base (230V only).

Su richiesta disponibile anche con porta-lampada GY16 (solo 230V).