

Application

Beam style	well-defined, flat field profile projection
Suitable for	large scale theatre
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	4 - 12m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cooling	low-noise fan-assisted ventilation
Cable/connection	2m, 3 x 2.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm diameter, aluminium
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting.
Handle	rear
Weight/Packed weight	13,7 kg / 16,5kg
Packed volume	0.11m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Safety guard	supplied
Colour frame	metal, 185 x 185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	4 shutters, included + iris, accessory
Positional adjustment	lever tilt clamp

Lamp types

2000W	CP72 GY16 230/240V 3200K 480 hrs
-------	----------------------------------

LDR recommends Philips lamps

Accessories

Lamps	see above
Spare metal colour frame	20100106
Spare safety guard	20100206
Iris diaphragm	20100706
Gobo holder, A/B size, metal	20100806
Hook clamp HD	20101000
Alu-grip clamp	20101100
Safety bond	20101200
Colour scroller Xpress 19	20106019 with mounting plate 20600006

Photometric data

Narrow focus		CP72									
Beam dia.	2.1	2.7	3.2	3.8	4.3	4.8	5.4	5.9	6.4	m	
lux	6263	4008	2783	2045	1566	1237	1002	828	696		
Distance	4	5	6	7	8	9	10	11	12	m	

Wide focus											
Beam dia.	4.2	5.2	6.2	7.3	8.3	9.4	10.4	11.5	12.5	m	
lux	2406	1540	1069	786	602	475	385	318	267		
Distance	4	5	6	7	8	9	10	11	12	m	


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

tono[®] 30/55

2000W

profile spotlight

part number 10903040

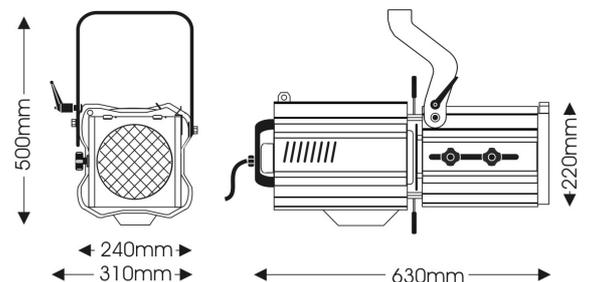

Extremely wide-angle 2000W profile spotlight for very close projection in larger venues.

It incorporates a zoom focus double condenser optical system, rotating gate, a cranked fork and a double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

Issue: ap ©2009. LDR reserves the right to alter the specification without prior notice.