

Application

Beam style	well-defined, flat field profile projection
Suitable for	large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 - 30m / 33 - 99 ft

Electrical specifications

Supply Volts	120V AC single phase
Max. Lamp Watts	2000W
Lamp base	GY16
Auto-disconnect	double-pole microswitch
Cable/connection	2m / 6.6ft 3-core cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	epoxy powder paint, black or white
Lamp House Construction	extruded aluminium and sheet steel
Reflector	68mm/2.68in diameter aluminium
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm/0.48in centre hole and DIN mounting. Spigot for ø28mm/1.10in tube supplied
Handle	one, covering side and rear of followspot
Weight/Packed weight	19,4kg / 41lb net - 24,7kg / 53 lb packed
Packed volume	0.204m ³ ballast: 0.049m ³
Filter cut size	185 x 185mm / 7.28x7.28in
Accessory runners	3 slots, accessory
Colour frame	metal, 185x185mm / 7.28x7.28in, accessory
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia./softness) at side
Lamp alignment	factory set
Beam Shaping	20 leaves iris included; shutters are accessories
Dimming	by mains supply + optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

2000W 3200K	CP79 GY16 120V 350 hrs
-------------	------------------------

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106	□20100106B	
5-colour colour changer	■20105106	□20105106B	
Spare iris diaphragm	20100707	Gobo holder, A/B size	20100807
Black tripod	20102401	Chrome plated tripod	20102402
Colour frame + runners	20109106	Spare spigot ø28mm	20102200
Kit 1-hand control iris/dowser	20107070	Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107080	for f.spot/ballast/col.chang./tripod	

Photometric data

Narrow focus							CP79
Beam dia.	0,9	1,7	2,1	2,6	3		m
	33,5	67,1	83,9	100,6	117,4		in
lux	12842	3210	2055	1427	1048		
	20	40	50	60	70		ft
Distance	6,1	12	15,2	18,3	21,3		m
Wide focus							
Beam dia.	1,6	3,2	4	4,8	5,6		m
	5,3	10,5	13,2	15,8	18,5		ft
lux	5322	1330	851	591	434		
	20	40	50	60	70		ft
Distance	10	12	14	16	18		m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto® 2000 TH MK2

2000W, 120V, 50/60Hz

TH followspot

part number: 11907170

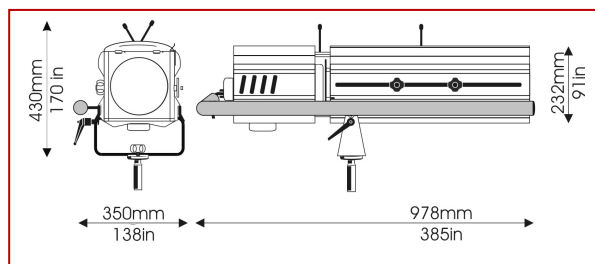

The most powerful dimmable tungsten halogen followspot in the Canto® range, the 2000W has been completely re-engineered to offer the market an even wider and better set of features. A large, user-friendly side handle, new mechanics on the mechanical dimmer and a number of "invisible" new features add to the existing specifications which have made Canto® a world-wide success.

An iris, mechanical dimmer, spigot, colour frame and 2m mains cable are supplied as standard, and a 5-colour colour changer is available as an optional extra.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2008. LDR reserves the right to alter the specification without prior notice