SUONO F 250 P.O.

■ 12201080 *Black* □ 12201081 *White* ▒ 12201082 *Silver*

ACCESSORIES

20100103
colour frame, black

20100103B
colour frame, white

20100103C
colour frame, silver

20100303
4-leaf barndoor, black

20100303B
4-leaf barndoor, white

20100303C
4-leaf barndoor, silver

20100303D
4-leaf barndoor, white/black

20100303E
4-leaf barndoor, silver/black

20101103
alu-grip clamp with spigot

20101200
safety bond

PRODUCT SPECS

lens type
120mm dia. Fresnel

reflector
55mm dia. glass

microswitch
no

colour frame
150x150mm

throw
2-20m

beam angle
7°-63°

weight
10,4kg

COMPATIBLE LAMPS

Philips MSD 250 **GY9.5** 6700°K 3000hrs
Philips MSD 250/2 **GY9.5** 8500°K 3000hrs
Philips MSA 300 **GY9.5** 6000°K 4000hrs

• LDR recommends Philips lamps

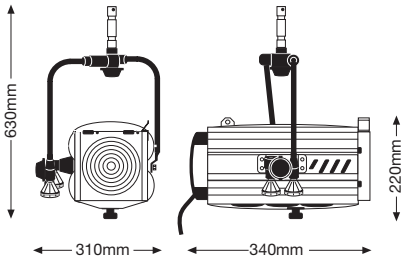

High power discharge Fresnel spotlight for display and architectural lighting, equipped with a pole-operated stirrup for the control of pan and tilt.
Available to special order in any colour from the RAL range, it is supplied with built-in ballast, colour frame and 1.5m mains cable.

Illuminatore fresnel per lampade a scarica 250MSD o 300MSA, ideale per utilizzi architetturali su aree espositive, in show room, vetrine, musei o centri commerciali. Dotato di forcella con comando a palo per il controllo della posizione orizzontale e verticale.
Fornito di serie completo di ballast multifrequenza incorporato, telaio porta-gelatina 150x150mm e 1.5m cavo di alimentazione.
A richiesta è disponibile in qualsiasi colore della gamma RAL.

PHOTOMETRIC DATA — MSD 250/2

SPOT	m ø	0,2	0,4	0,5	0,6	0,7	0,9	1	1.1	1.2
	lux	23.150	10.289	5.788	3.704	2.572	1.890	1.447	1.143	926
	m →	2	3	4	5	6	8	10	12	14
FLOOD	m ø	2,5	3,7	4,9	6,1	7,4	8,6	9,8	11	12,3
	lux	3.300	1.467	825	528	367	269	206	163	132
	m →	2	3	4	5	6	7	8	9	10