

TONO F 2000 P.O.

- 12901000 230V *Black*
■ 13901000 120V *Black*

ACCESSORIES

- 20100107**
colour frame
- 20100207**
safety guard
- 20100307**
4-leaf barndoor
- 20101103**
alu-grip clamp with spigot
- 20101200**
safety bond




PRODUCT SPECS

- lens type**
200mm dia. Fresnel
- reflector**
87mm dia. glass
- microswitch**
double-pole
- colour frame**
245x245mm
- throw**
3-20m
- beam angle**
10°-70°
- lamp base**
G22 (230V) G38 (120V)
- weight**
10.4kg (230V) 11.5kg (120V)

COMPATIBLE LAMPS

- CP55 G22 2000W 230V/240V 3200°K 480hrs
CP75 G22 2000W 230V/240V 3200°K 480hrs
CP92 G22 2000W 230V/240V 3200°K 400hrs
CP72 GY16 2000W 230V/240V 3200°K 480hrs
CP91 G22 2500W 230V/240V 3200°K 400hrs
CYX G38 2000W 120V 3200°K 350hrs

- LDR recommends Philips lamps

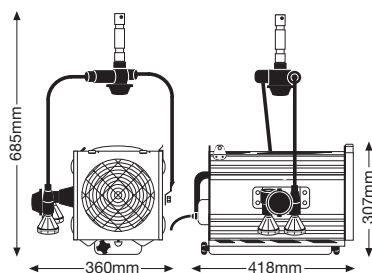

PHOTOMETRIC DATA

CP75

FLOOD	SPOT	m ϕ	2,3	2,5	2,7	2,9	3,1	3,3	3,5	3,7	3,9		
		lux	1.563	1.331	1.148	1.000	879	779	694	623	563		
	FLOOD	SPOT	m $\rightarrow$	12	13	14	15	16	17	18	19	20	
			m ϕ	4,2	5,6	7,0	8,4	9,8	11,2	12,6	14,0	15,4	
		FLOOD	SPOT	lux	2.200	1.238	792	550	404	309	244	198	164
				m $\rightarrow$	3	4	5	6	7	8	9	10	11

On request also available with
GY16 lamp-base (230V only).

Su richiesta disponibile anche con porta-lampada GY16 (solo 230V).

Compact, lightweight and powerful
2/2.5KW fresnel spotlight.

It features an extremely wide beam angle and includes a height adjustable, robust G22 lampbase, screw focus, tilt lock and double-microswitch interlock. It's ideal for all those applications in larger venues where the luminaires are difficult to access and whose position needs to be changed frequently. A colour frame, safety guard and 1.5m mains cable are included as standard.

Illuminatore fresnel da 2/2500W
 estremamente compatto, leggero
 e potente, dotato di forcella per
 comando a palo della posizione
 orizzontale e verticale. Ideale per
 tutte quelle installazioni con
 illuminatori di difficile accesso e la
 cui posizione debba essere
 modificata di frequente.

Dispone di robusto portalampada G22 regolabile in altezza, messa a fuoco di precisione con vite senza fine, e doppio microinterruttore di sicurezza. Fornito di serie completo di telaio porta-gelatina, rete di protezione e 1.5m cavo di alimentazione.