GE Consumer & Industrial Specialty Lighting


CSR Lamps



The GE CSR575/2/T/SE lamp is a single ended metal halide lamp with an outer jacket. It's small arc gap of 7 mm provides greater optical control and luminance. This lamp is compact, highly efficient, and at 7200K provides a white bright light but is below the black body curve so it provides a slightly warmer color than the standard CSR575/2/SE. It is a cold start lamp with a maximum seal temperature of 350° C.

Product Description
CSR575/2/T/SE

 Order Description Product Code Pack Quantity Rated Wattage Rated Voltage Lamp Current (ECG/MCG)* 	CSR575/2/T/SE 49492 10 575 97(+15-10)V 5.9A
 Ignition Voltage (cold/hot) 	4.5)
•Lumens	42,000 Lm
•Lumens per watt	73
•Ra	>65
 Chromaticity 	× 0.301
coordinates	y 0.302
•Color temperature	7,200K
•Arc Length (C)	7.0±1.0mm
•Lamp length (A)	MAX125
 Light center length (B) 	65±1.0
•Lamp diameter	ΜΑΧφ29
 Average rated life 	1,000hr
•Base	GX9.5

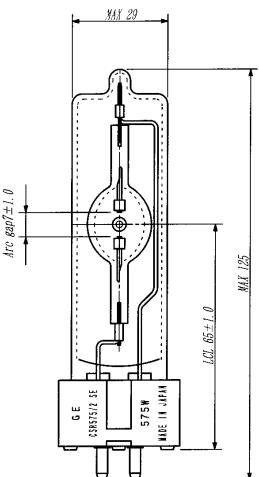

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation

Burn PositionAnyMaximum Seal Temperature350° CCoolingForced Cooling/FanLamp can be used on electronic or AC magneticBallast/igniters



GE imagination at work

Application Information

- •Do not exceed rated wattage or voltage
- •Replace lamp at or before rated life
- •Do not exceed rated seal temperature
- •Use only with properly rated fixtures and ballasts

and General Electric are both registered trademarks of the General Electric Company, USA. @ General Electric Company (USA) 2006 GE Consumer & Industrial Speciality Lighting is constantly developing and improving its products. For this reason, all product development, without prior notification are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification are public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any control. Data in this guide thes been obtained in controlled dependent However, GE Lighting connot accept any loaking arising from the reference on such data to the extent permitted by Jow. CS875/27/175 - Data shet – July 2006