

# DMX1SW – Single Channel DMX Switch

DMX1SW device allows controlling of 230V/50Hz 16A electrical devices from theatrical light desk via the DMX line. Switching of the output is done via the relays for phase and neutral lines. The DMX1SW device is equipped with a socket according to customer's needs. Custom made firmware is on request.



- 1-channel switching Phase and Neutral
- Relay protection for 100A spike
- Overvoltage protection of DMX input
- LED indication of DMX line
- DIP switch for DMX address setting
- Neutrik 3- or 5-pin on request

#### • Sockets:

- Schuko
- French Schuko
- Swiss
- CEE16/3p
- Danish

#### DMX input with TRUE output

USITT DMX 512 (1990)

#### Switching output

1 switching output 230V – 16A, fused with 16A FUSE and optical signalization of active output channel on the top panel by a glow lamp.

#### Power supply

AC 230V/ 50Hz, 16A

#### Temperature of use

-20...+60°C

#### Housing

Steel housing with powder coating  
110 x 44 x 145 mm

#### Weight


1.0 kg

#### XLR 3- or 5- pin connector (Neutrik<sup>®</sup>)

Pin 1	Data CMN
Pin 2	Data -
Pin 3	Data +
Pin 4, 5	not connected



#### Front panel description

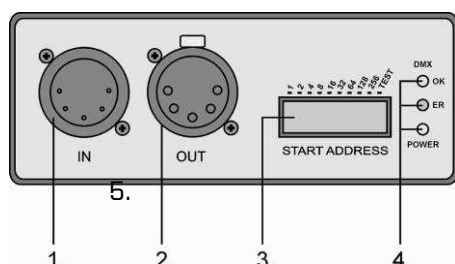

1. DMX input connector
2. DMX output connector
3. DMX start address selector
4. DMX and POWER status LEDs