

Application

Beam style	asymmetric flood
Suitable for	cyclorama lighting in all applications
Specification level	professional range
Typical throw distance	0.5m – 3m from lit surface

Electrical specifications

Light source	12x 15W LED, RGBW
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 0.45A @ 230V AC or 0,95 A @ 110V AC
Power consumption	105W at full power
Cable/connection	Neutrik powercon IN and OUT
Power cable	1.6m 3x1.5mm power cable with fitted powercon, supplied
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint. On demand also available in any colour of the RAL range
Construction	aluminium and steel-sheet body
Reflector	asymmetrical proprietary curve, specular aluminium
Mounting & suspension	double steel stirrup with 12mm centre hole and DIN mounting
Weight/Packed weight	5kg / 7kg
Packed volume	0.069m ³
Safety glass	included

Operational specifications

Working position	any, stand-alone or hung, any tilting
Positional adjustment	tilt lock on one side
DMX channels / connection	6 or 7 ch / XLR5 connectors, IN/OUT
Colours	RGBW
Dimming	From rear panel encoder or remote, 8 or 16 bits via DMX signal
LED temperature	Built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available: Silent/Auto/Constant
Fade curves	2 curves (linear, square)
LED Frequency	16KHz – Flicker free
LCD display	Set-up, dmx, monitor, diagnostics
RDM	Integrated
Software upload	Remote, via DMX 512 cables

Accessories

Spare clear safety glass	20101460
Remoto, gateway for software upload	20702072
Hook clamp	20100900
Safety bond	20101300

Photometric data – measured at ½ peak angle

Horizontal (H)	0.8	1.7	2.5	3.4	4.2	5.0	m
Vertical (V)	1.3	2.5	3.8	5.0	6.3	7.5	m
R	356	89	40	23	15	10	lux
G	1210	303	135	76	50	34	lux
B	53	14	6	3.5	2.2	1.5	lux
W	1250	312	140	78	51	35	lux
FULL	2640	660	293	166	106	73	lux
Distance(D)	0.5	1	1.5	2	2.5	3	m


LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

SAMBA A100 CM

120W LED RGBW

asymmetric floodlight

part number: 01106250 01106251 01106252

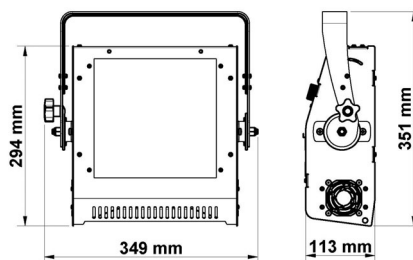

120 watt LED RGBW asymmetrical floodlight ideal for cyclorama-type lighting in all applications.

SAMBA is an elegant, compact, light-weight fixture which can be installed in any position, either stand-alone or hung from a truss even on very small stages or locations with reduced space.

Utilizing a multi functional display or DMX / RDM interface for ease of operation, it provides a high precision multicurve dimming system along with pure colour mixing throughout all fields of colours.

The Samba is energy efficient, reliable, and built to last and is also available in 3200K and 5600K white LED



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2018 LDR reserves the right to alter the specification without prior notice.