

CITY THEATRICAL

NEW YORK • LONDON

MOUNTING AND SAFETY INSTRUCTIONS FOR THE MOVING LIGHT HANGER SYSTEM



P/N 138
(hang from pipe)



P/N 137
(hang from Unistrut)



P/N 130
(hang from scenery)



P/N 135
(attaches to fixture)

Thank you for purchasing the most flexible system available for mounting your moving lights, video, or sound equipment.

Safety Features:

The Moving Light Hanger System has a load rating of 100 pounds per hanger when used in a straight down application. Side mounting of the system is not recommended.

The design of the Moving Light Hanger System incorporates a cupped Tightening Knob that engages the bottom of the Tee Slot. When the user settles the Tee Head into the counter bored area of the Tee Slot, the Tee Head cannot be pulled out of the Tee Slot unless the user picks up the Tee Head and purposefully removes it from the Tee Slot. The tightening knob, spun up against the base of the Tee Slot, does not allow the Tee Head to be removed from the Tee Slot. The rubber clip on the 135 keeps the Tee Head's tightening knob from vibrating loose in use or in transit.

Continued on page 2

475 BARELL AVENUE, CARLSTADT, NJ 07072
800.230.9497 201.549.1160 201.549.1161 FAX
www.citytheatrical.com

Flexibility:

The Tee Slot is the heart of this flexible system and three varieties are available: 138 for hanging from pipe, 137 for hanging from Unistrut, and 130 for bolting to objects such as brackets or scenery.


Installing the System:

First, attach 135 Round Tee Heads to your lighting fixture using the included hardware.

The 138 (Tee Slot with Integral Split Coupler) comes ready to use. The easiest way to hang the equipment the first time is as follows: Attach the 138s to the 135s that you previously bolted onto your equipment and tighten the knob of the 135 against the base of the 138. Lift the moving light with the attached Moving Light Hanger System parts and hang the unit onto the pipe. Level the moving light and then tighten the couplers as you would any other aluminum coupler.

With the 138s in place you can now place and remove the moving lights when needed. No adjustment should be necessary when replacing a moving light in your rig.

The 137 and 130 can be mounted in a similar way to 138, depending on your hanging situation.

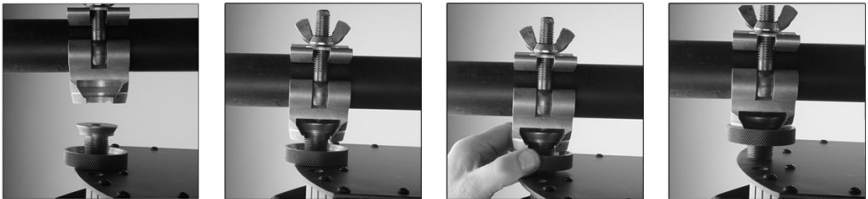

A FEW DOs AND DON'Ts:

DO:

Remember to tighten the tightening knob on the Tee Head against the base of the Tee Slot.

Remember to insert and settle the Tee Head fully into the Tee Slot prior to tightening the tightening knob.

DO NOT:

Weld anything to the Tee Slot or Tee Head.

Use the Tee Slot System to hang any personnel.

Use the Tee Slot System to hang a structure on which personnel will be working.