

SUONO 10/28 PLUS

10604020 Black 10604021 White 10604022 Silver

ACCESSORIES

- 20100102**
colour frame, black
- 20100102B**
colour frame, white
- 20100102C**
colour frame, silver
- 20100202**
safety guard, black
- 20100202B**
safety guard, white
- 20100202C**
safety guard, silver
- 20100707**
iris diaphragm
- 20100801**
gobo holder, M/D size
- 20100900**
hook clamp
- 20101100**
alu-grip clamp
- 20101200**
safety bond
- 20106013**
colour scroller Xpress 13



Compact and high-specification 500W/650W profile spotlight with a double-condenser zoom focus optical system to provide crisp projection of gobos and a brilliant flat beam between 10° and 28°.

Features include a rotating gate, zoom controls on teflon sleeves, hinged lamp tray and double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 1.5m mains cable are all included as standard.


Sagomatore da 650W con sistema ottico a doppio condensatore, dall'eccellente precisione e nitida proiezione di gobo. Dispone di alloggiamento ghigliottine girevole, movimento zoom su supporti in teflon e doppio microinterruttore di sicurezza.

Fornito di serie completo di telaio portagelatina, rete di protezione, 4 ghigliottine sagomatrici e 1.5m cavo di alimentazione.

COMPATIBLE LAMPS

- M38 GY9.5** 300W 230V/240V 2950°K 2000hrs
- M40 GY9.5** 500W 230V/240V 2950°K 2000hrs
- T18 GY9.5** 500W 230V/240V 3000°K 360hrs
- T25 GY9.5** 500W 230V/240V 3000°K 360hrs
- T26 GY9.5** 650W 230V/240V 3050°K 600hrs
- T27 GY9.5** 650W 230V/240V 3050°K 600hrs

• LDR recommends Philips lamps

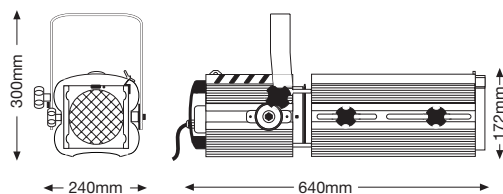

16

PRODUCT SPECS

- lens type**
double condenser+zoom
- reflector**
55mm dia. aluminium
- microswitch**
double-pole
- colour frame**
125x125mm
- throw**
2-15m
- beam angle**
10°-28°
- weight**
7,5kg

PHOTOMETRIC DATA

T27

NARROW	m Ø	1,2	1,4	1,6	1,7	1,9	2,1	2,3	2,4	2,6
	lux	1.071	820	648	525	434	365	311	268	233
WIDE	m	7	8	9	10	11	12	13	14	15
	m Ø	1	1,5	2	2,5	3	3,5	4	4,5	5
	lux	6.625	2.944	1.656	1.060	736	541	414	327	265
	m	2	3	4	5	6	7	8	9	10

